MORE FROM WOOD.

EGGER

Version: 03
Approved: 18.06.2026

Self-Declaration According to ISO14021

Environmental & Health Data Sheet*

EGGER Flooring AquaDura+

Recipe: 665

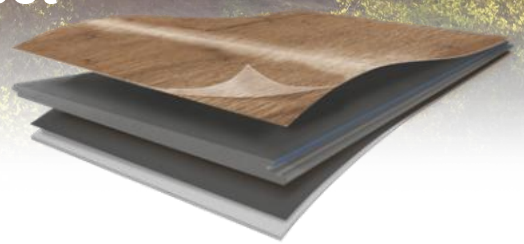

LEED
WELL v2™
BREEAM International v6
DGNB
QNG
CAM Italy
HQE



Our EcoFacts show the environmental impact of our product at a glance.**

GWP-total***: **3,5 kgCO_2/m²**
GWP-fossil: **11,9 kgCO_2/m²**
GWP-biogenic: **-8,5 kgCO_2/m²**
GWP-luluc: **0.01 kgCO_2/m²**

32% Primary raw materials*****
68% Material from the circular economy
7% of which is post-consumer recycling material,
93% of which are by-products from the sawmill industry

Recyclable****

71% material from renewable resources,
29% material from fossil resources

*The English version is always legally binding.
***EcoFacts Circularity and Renewable Resources are based on recipe specific internal calculations.
***Link to EPD provided in chapter "Relevant Documents"
****Chapter "End of Life" describes procedures for possible utilization streams
*****Wood from sustainable forestry, specifically thinning wood or roundwood that cannot be sawn, represents the biggest share in this category.

Table of Contents

Raw Materials & Primary Products **2**
Wood Origin 2
Constituent Materials 2
Product Emissions and Health Aspect 3
Processing & Use **4**
Safety, Processing and Maintenance Instructions 4
End of Life – Reuse, Recycling, Incineration **4**
Compliances and Certifications **5**
Production Plants and their Certifications 5
Compliance with Building Certificates 5
Relevant Documents for Building Certificates 6
Footnotes **16**
Plant Addresses 16
List of Abbreviations 16

Raw Materials & Primary Products

Wood Origin

Our plants are certified according to the standard ISO 38200:2018. Further information about our principles for sustainable forest management and wood purchase can be found in our Manufacturer Declaration on Sustainable Forestry VRG 229, for information on our timber origin please refer to our Manufacturer Declaration on Timber Origin VRG 270.
Upon request, our products can be listed on our sales documents with additional 3rd party certification claims, depending on their availability during production.
Links to the certificates can be found in the relevant documents for building certificates and ecolabels.

Constituent Materials

EGGER AquaDura+ Flooring products are modular, wood-based floor coverings consisting of a wood-based core material, an elastic, functional wear layer and a waterproof, mechanical locking system. The products are declared in accordance with product standard EN16511 and are intended for floating installation in residential and commercial areas. The products have integrated impact-noise insulation made from recycled natural fibers. They offer an extended range of applications, including bathrooms, conservatories and kitchens. The table below contains 99.9% of the primary products, measured by dry weight. Proportions may vary between individual product thicknesses. Listed is the average across all thicknesses and all production plants based on the values from fiscal year 2025. All chemicals have been evaluated and are disclosed down to 1000 ppm.

Proportion		Function	Composition
64	%	Dry wood fibres (core board)	Industrial round wood, sawmill by-products, Pre- and Post-consumer recycling wood
19	%	Glue (core board)	Melamine-urea-formaldehyde binding agent (MUF)*
6	%	Sound absorbing board	Recycled cellulose (90% Post-Consumer-content)

Proportion		Function	Composition
4	%	Laminate layer (Lamination)	40% décor paper 60% Melamine-formaldehyde resin* and additives
3	%	Wear layer	Polypropylene wear layer with excimer coating, PVC-free
2	%	Adhesion of wear and sound absorbing layer	Polyurethane hotmelt adhesive
1	%	Hydrophobing agent (core board)	Paraffine wax emulsion
<1	%	Hardener (core board)	Ammonium nitrate / Ammonium sulphate / Chloride-free
<1	%	Pigment color (core board)	-

*During the pressing process, the aminoplastic adhesive/MDI hardens fully. Under normal conditions, it is bound to the wood and chemically stable.

Product Emissions and Health Aspect

The product emits formaldehyde and volatile organic compounds from the used wood. During the EGGER AquaDura+'s manufacturing processes, heat and pressure is applied in a short cycle press. The used resins are cured in the production process. In the use phase, the product is chemically stable under normal conditions. There are no known health hazards or adverse health effects to be expected under normal conditions, when the product is used as intended.

The product is subjected to annual emission tests within the scope of TÜV PROFiCERT-product Interior surveillance by an independent third party. These tests are done at each plant, thus the TÜV PROFiCERT-product Interior certificates are plant-specific, too. Your local sales person can provide you with the according documentation.
Requirements listed as met "via TÜV PROFiCERT" are NOT CERTIFIED stand-alone in this category!
The following table contains an overview of requirements, on which the product has been tested by an independent third party and fulfills the emission requirements. For further information and for emission thresholds, please refer to the "Criteria for Allocation Interior", available at the PROFiCERT-Website.

Requirements	Substance/Indicator	Fulfillment	Requirement Details
E1 (E05)	Formaldehyde	✓	Formaldehyde class E1, external testing, compliant with REACH already as raw board
TSCA Title VI	Formaldehyde	✓	U.S. Toxic Substances Control Act, external certification (core board)
AgBB 2024	VOC, Carcinogens	✓	Additional with TÜV PROFiCERT-product interior PREMIUM
French VOC regulation, Emission Class A+	VOC	✓	
Blue Angel (AgBB) UZ176 *gütig bis Ende 2026	VOC, Formaldehyde	✓	
Belgian VOC Regulation	VOC	✓	
CAM Italy	VOC, Formaldehyde, Carcinogens, Harmful Substances	✓	
Austrian Ecolabel, Guideline UZ 07	VOC	✓	
ChemVerbotsV E1 DE 2020	VOC, Formaldehyde, Carcinogens, Harmful Substances	✓	
LEED v5 (Outside of North	Formaldehyde	✓	

Requirements	Substance/Indicator	Fulfillment	Requirement Details
America)			
BREEAM Exemplary Level / General Level	VOC, Formaldehyde, Carcinogens	✓	
QNG Anforderungskatalog 313, Version 1.3	Formaldehyde, VOC	✓	
French VOC Regulation, Emission Class A+	VOC	✓	
Finnish M1 Classification	VOC	✓	
DGNB	Formaldehyde, VOC	✓	
HQE	VOC, Formaldehyde	✓	

Processing & Use

Safety, Processing and Maintenance Instructions

This product is not hazardous in the form in which it is shipped by the manufacturer. Downstream activities (e.g. grinding, sanding, cutting or pulverizing) may generate wood dust, which is hazardous. Wear a respiratory mask if using hand tools without a dust extraction device. Observe all liability insurance association regulations for commercial processing operations (e.g. safety goggles).
For further information on safety, processing or maintenance instructions, see:

- Technical Datasheet EGGER Flooring AquaDura+
- Installation Instructions
- Cleaning and Care Instructions
- Guarantee Declaration – Voluntary Manufacturer's Guarantee
- Declaration of Performance:

Product	AquaDura+
Recipe	655
Declaration of Performance (DoP-Number)	DoP-DF006

End of Life – Reuse, Recycling, Incineration

Waste code according to European Waste Catalogue, depending on origin of the waste:

- 17 02 01 Construction & Demolition Waste Wood or
- 03 01 05 Sawdust, Shavings, Cuttings, Wood, Particle Board and Veneer Not Containing Hazardous Substances

In addition to our usual packaging, this product is being delivered with a protective film on its surface. This specific packaging material has the following waste code:

- 15 01 02 Plastic Packaging

The product is not classified as hazardous waste. Used EGGER AquaDura+ can be classified as glued, laminated waste wood without halogenated compounds in the lamination layer and without wood preservatives. See also the documents available for download at www.egger.com/environment:

- Manufacturer Declaration on Wood Preservatives
- Manufacturer Declaration on Halogenated Organic Compounds

Reuse	During remodeling or at the end of the utilization phase of a building, the product can easily be separated and used again for the same applications, if selective deconstruction is practiced. This is only possible if the product has not been bonded over its entire surface.
Recycling	Any leftovers from this product that accrue on the construction site, as well as those from deconstruction measures, should primarily be routed to a material utilization stream for use as post-consumer recycled wood. This can be used as a secondary resource in the production of new particleboards as part of the post-consumer recycling material stream.
Incineration	After its utilization phase, the product should be separated and routed to an energetic recovery, due to its high calorific value. Upon incineration, kindly observe all locally applicable legal requirements for the correct dimensions, required filter technologies, operating conditions, and legal permissions for wood-based panels/fiberboards.

Compliances and Certifications

Production Plants and their Certifications

The product is manufactured at the following locations. You can find the certifications available for download linked in the column headings of the table below. The plant addresses are available in the Footnotes.

Plant	Certification Obtained by This Plant or Product				
	Quality (ISO 9001)	Environment (ISO 14001)	Energy (ISO 50001)	Wood origin (ISO 38200)	TÜV PROFiCERT-Product Interior
Wismar, DE	✓	✓	✓	✓	PREMIUM

Compliance with Building Certificates

An analysis was carried out for the requirements of the following certificates and we can state that EGGER AquaDura+ is compliant as listed in the tables below. To fulfill some of the requirements of specific building certificates it is necessary to conduct an analysis of all used building products. This means that we cannot ensure the acquiring of points and that an individual assessment is necessary for each project. Also, our product may contribute beyond the listed requirements. If not otherwise mentioned, we can provide you with the necessary documents.

General Information:
Some building certificates, for example LEED v5 and WELL v2™ certification schemes, demand third party certification for gathering additional points in some of their optimization credits. At this point our product is **not certified** with the following certifications:

- Cradle to Cradle, Declare, Global Green TAG, Health Product Challenge, Living Product Challenge

In doubt, please refer to the certification program holder themselves.
Please note that our products are not certified or validated in any way by the building certification program holder. Reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may change product properties and thus invalidate certificate applicability. Fabricators need to test and certify their reworked or manipulated product on their own.

Click on the desired certificate for easy navigation to detailed information:

LEED v5.1 ✓ | QNG ✓ | BREEAM International v6 ✓
WELL v2™ ✓ | DGNB ✓
CAM Italy ✓ | HQE ✓

Relevant Documents for Building Certificates and Ecolabels

Please click on the desired document to be redirected.

Relevant Documents	LEED	BREEAM	WELL	DGNB	QNG	CAM Italy	HQE
Environmental Product Declaration (EPD)	✓	✓		✓	✓		✓
TÜV PROFiCERT-interior PREMIUM	✓	✓	✓	✓	✓	✓	✓
FloorScore Certificate*	✓		✓				
Testing Protocols**				✓	✓		
3rd Party Wood Certificate* **	(✓)	(✓)		(✓)	(✓)	(✓)	
Certificate ISO 38200:2018	✓	✓			✓	✓	
Technical Datasheet AquaDura+					✓		
Declaration of Performance							
Cleaning Instructions							
Guarantee Declaration							
Installation Instructions							
Manufacturer Declaration on Timber Origin	✓			✓	✓	✓	✓
Manufacturer Declaration on Sustainable Forestry							
Manufacturer Declaration Asbestos			✓				✓
Manufacturer Declaration HFR**			✓				
Manufacturer Declaration PFAS**			✓				
Manufacturer Declaration REACH	✓			✓	✓		
Manufacturer Declaration Wood Preservative				✓			
Manufacturer Declaration on Biocides**				✓	✓		
Manufacturer Declaration RoHS	✓						

✓: relevant (✓): available on request *depends on bought product ** Please contact your salesperson or use our contact form

Compliance with LEED v5

The following table shows all LEED credits which are applicable to the usage of our product. As the achievable number of points depends on the attributes of all used materials in the LEED building project and further actions by the constructor, we cannot guarantee to obtain the maximum score.
For full requirement terms see LEED credit library at USGBC | U.S. Green Building Council.

LEED Projects Outside U.S.

Please note that formaldehyde emission requirements in LEED v5 are deviating for projects inside U.S.

LEED v5 Requirements for Building Design + Construction (BD + C)
New Construction, Core and Shell
LEED v5 Requirements for Interior Design and Construction (ID + C)
Commercial Interiors, Retail, Hospitality

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Credit Category	Credit Name and Description	Product Contribution	Maximum Points
Material and Resources	**Reduce Embodied Carbon** ▪ Option 2: Environmental Product Declaration (EPD) Analysis	This product has a verified Environmental Product Declaration (EPD) according to ISO 14025 and EN 15804 + A2 .	Up to 4 points
	Building Product Selection and Procurement Criteria Areas ▪ Climate Health: EPD: Product-Specific Type III	This product has a verified Environmental Product Declaration (EPD) according to ISO 14025 and EN 15804 + A2 .	1 Attribute Score
	▪ Ecosystem Health – Wood products: Legal Sourcing with Disclosure	The product is verified by the ISO 38200:2018 statements. Additionally, the product can be purchased in other 3rd party certified qualities **on request,** e.g. PEFC. Use delivery receipt as evidence. See chapter "Wood Origin" for further information.	Up to 4 Attribute Scores
	▪ Circular Economy: Recycled Content (Recycled content is the sum of postconsumer recycled content plus one-half of the preconsumer recycled.)	The recycling content of the product depends on the production plant. Check the recycling content percentage as stated in our Manufacturer Declaration on Timber Origin or contact your sales person.	Up to 1 Attribute Scores
	▪ Human Health Level 1: Inventory assessment completed to at least 0,1% (1000ppm)	Please see chapter "Constituent Materials" for content inventory.	-
Regional Alternative Compliance Paths	**EU Taxonomy: Low-Emitting Materials** ▪ Building components and materials used in the construction comply with the criteria set out in Appendix C.	The product complies with this criteria. Please see Manufacturer Declaration REACH.	Prerequisite

Credit Category	Credit Name and Description	Product Contribution	Maximum Points
	▪ Building components that may come into contact with occupiers emit less than: 0,06mg of formaldehyde per m³ and 0,001 mg of categories 1A and 1B carcinogenic volatile organic compounds per m³. (with CEN/EN 16516 or ISO 16000-3:2011 or other equivalent standardized test conditions.)	The product complies with this criteria. Please use TÜV PROFiCERT-product interior certificate as evidence document.	Up to 2 points
	▪ Option 3): Demonstrate compliance with testing standard EN 16516:2017+A1:2020, be compliant with German AgBB Testing and Evaluation Scheme, meet formaldehyde limit of 10µ/m³	The product complies with this criteria. Please use TÜV PROFiCERT-product interior certificate as evidence document.	Up to 2 points

LEED Projects inside U.S.

LEED v5 Requirements for Building Design + Construction (BD + C)
New Construction, Core and Shell
LEED v5 Requirements for Interior Design and Construction (ID + C)
Commercial Interiors, Retail, Hospitality

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Credit Category	Credit Name and Description	Product Contribution	Maximum Points
Material and Resources	As the requirements are identical for those for projects outside the U.S., please refer to the table for LEED Projects outside U.S. .		
	Low-Emitting Materials VOC Emissions Evaluation ▪ Product has been tested according to CDPH Standard Method v1.2-2017 Formaldehyde Emission Evaluation ▪ Certified as ultra-low emitting formaldehyde (ULEF), ▪ Certified as no added formaldehyde resins (NAF)	The product is compliant with this credit. See chapter "Product Emission & Health Aspects" for further information. Use the FloorScore-certificate as evidence document.	-
		The product is not certified according to ULEF.	

Compliance with WELL Building Standard v2™

EGGER AquaDura+ is compliant with the preconditions for use in WELL v2 certified building. Beyond that the usage of this product may contribute to gathering additional points within the WELL scoring system. As the actually achievable number of points depends on the attributes of all materials used in the building project and further actions by the constructor, we cannot guarantee to obtain the maximum score.

For full requirement terms please see: Standard | WELL V2

The following table shows all WELL features which are applicable to the usage of our product.

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Concept	Feature and Description	Product Contribution	Maximum Points
X01 Material Restrictions	**Part 1: Restrict Asbestos**	The product complies with this precondition. Use Manufacturer Declaration – Asbestos for evidence.	Precondition
X05 Enhanced Material Restrictions	**Part 2: Select Compliant Interior Furnishings and Interior Product** Ceiling and wall finishes and demountable wall partitions contain 100ppm by weight or less of the following: ▪ Halogenated flame retardants (HFR) ▪ Orthophtalates	The product complies with this requirement. No halogenated flame retardants (HFR) are used in this product. In general, no softening agents are used in the production of chipboards, in particular phthalates. See chapter "Constituent Materials" above for your documentation. See Manufacturer Declaration on the Use of Halogenated Compounds for evidence.	1 point
X06 Volatile Compounds	**Part 2: Restrict VOC Emissions from Furniture, Architectural and Interior Products** Tested per methods and VOC emission threshold established in one of the following: ▪ CDPH ▪ AgBB All Composite wood panels meet one of the following: ▪ European E1, TSCA, F**** or LEED v5	Product complies with the LCI values of the German AgBB scheme. The product is tested per EN 717-1:2014 for formaldehyde emissions and complies with emissions class E1E05. See chapter "Product Emissions & Health Aspects" for further information. Use the TÜV PROFiCERT-product interior certificate as evidence document.	Up to 4 points
X07 Material Transparency	**Part 1: Selects Products with Disclosed Ingredients** ▪ h) A manufacturers inventory down to 1000pm	The product is screened to at least 1000ppm and the manufacturer has provided a publicly available inventory within this document. See chapter "Constituent Materials" for documentation.	1 point
X08 Materials Optimization	Our product does not participate in any of the listed programs for this requirement. It does not contribute to achieve points.		0 points

BREEAM International New Construction Version 6.0

EGGER AquaDura+ is compliant with the preconditions for use in BREEAM v6.0 certified building and fulfills the emission requirements at exemplary level. Beyond that the usage of this product may contribute to gather additional points within the BREEAM scoring system. As the actually achievable number of points depends on the attributes of all used materials in the building project and further actions by the constructor, we cannot guarantee to obtain the maximum score.

For full requirement terms please see BREEAM | Sustainable Building Certification

The following table shows all BREEAM features which are applicable to the usage of our product.

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Concept	Feature and Description	Product Contribution	Maximum Credits
Hea 02 Indoor Air Quality	**Avoidance of asbestos**	The product complies with this prerequisite. See Manufacturer Declaration – Asbestos as evidence.	Prerequisite
	Minimizing sources of air pollution – Emissions from building products Exemplary level emission criteria ▪ ≤ Formaldehyde 0.01 mg/m³ ▪ ≤ TVOC 0.3 mg/m³ ▪ ≤ TSVOC 0.1 mg/m³ ▪ Category 1A and 1B carcinogens 0.001 mg/m³	Use TÜV PROFiCERT - product Interior certificate as evidence document.	2 Credits
Mat 01 Life Cycle Impacts	**Environmental Product Declarations** Products installed by Post-Construction Stage are covered with verified EPD	This product has a verified Environmental Product Declaration (EPD) according to ISO 14025 and EN 15804 + A2 .	1 Credit
Mat 03 Responsible Sourcing of Construction Products	**All timber based products used on the projects are legally harvested and traded timber.**	The product is verified by the ISO 38200:2018 statements. Additionally, the product can be purchased in other 3rd party certified qualities **on request,** e.g. PEFC. Use delivery receipt as evidence. See chapter "Wood Origin" for further information.	Prerequisite

Compliance with DGNB System Version 2023 International – New Buildings Criteria Set

The DGNB Silver, Gold and Platinum ratings result from the overall level of fulfillment of the building project. Which quality levels EGGER AquaDura+ fulfills according to the DGNB system and where you can find the required verifications can be found in the following table. The contributions to the overall degree of fulfillment resulting from this according to the DGNB point system depend, among other things, on the relevance of the product group for the overall building. We can therefore not guarantee a score to be obtained through the use of EGGER AquaDura+.

Please note that other criteria are also relevant for the overall rating of the building.

For full requirement terms please see German Sustainable Building Council | DGNB

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Category	Credit Name and Description	Product Contribution	Quality Level
ENV 1.1 Climate Action and Energy	Disclosure of life cycle assessments Calculated life cycle assessments for greenhouse gas emissions and non-renewable primary energy are available for the realised building according to the defined format.	This product has a verified Environmental Product Declaration (EPD) according to ISO 14025 and EN 15804 + A2. The evaluation of the credit depends on the overall certification. For more information see chapter EcoFacts.	General requirement
ENV 1.2 Local Environmental Impact	No chemical wood preservative in the interior.	The product complies with these criteria. Use Manufacturer Declaration Wood Preservatives as evidence.	General requirement

Category	Credit Name and Description	Product Contribution	Quality Level
	Only product with SVHC ≤ 0.1% used	The product complies with these criteria. See chapter "Constituent Materials" for further information Use Manufacturer Declaration REACH as evidence.	General requirement
	Criteria matrix No. 47d – Wood-based materials for floor coverings: MMFs with wood materials QS4: ▪ DE-UZ 176 or ▪ Formaldehyde ≤ 0.05 ppm (DIN EN 16516 2018)	The product complies with these criteria. Use TÜV PROFiCERT-product Interior certificate as evidence.	4
ENV 1.3 Sustainable Resource Extraction	**It must be demonstrated that at least 50% (by mass) of the permanently installed wood or wood-based materials originate from certified sustainably managed sources.**	The product is verified by the ISO 38200:2018 statements. Additionally, the product can be purchased in other 3rd party certified qualities **on request,** e.g. PEFC. Use delivery receipt as evidence. See chapter "Wood Origin" for further information.	General requirement
TEC 1.6 Circular Construction	**ZE01**: Contained hazardous substances The product contains SVHC substances >0.1 mass %	See chapter "Constituent Materials" for further information. Use Manufacturer Declaration REACH as evidence	
	ZE02: Post-consumer recycled content	See chapter "Wood Origin" for further information. Use Manufacturer Declaration on Timber Origin as source document.	
	ZE04: Proportion of renewable raw materials	See chapter "Constituent Materials" for further information. Use Manufacturer Declaration on Timber Origin as source document.	
	ZE05: Biodegradability	The product is not biodegradable.	0 points
	ZE03, ZE06-ZE09	The application of these credits depend heavily on the product use. In case of doubt, please contact your sales person for additional documents.	

Compliance with Sustainable Building Certification – QNG (Qualitätssiegel nachhaltiges Gebäude)

EGGER AquaDura+ fulfills the requirements placed on construction products according to the QNG Sustainable Building Certification guidelines.

As the actually achievable number of points depends on the attributes of all used materials in the building project and further actions by the constructor, we cannot guarantee to obtain the maximum score.
Please note that other criteria are also relevant for the overall rating of the building.
The QNG guidelines are currently only available in German.

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Category	Credit Name and Description	Product Contribution
Anlage 3: Gebäudeanforderungen	**ANF1: Treibhausgas und Primärenergie** ▪ Berechnung Treibhausgasemissionen im Gebäudelebenszyklus maximal 24kg CO_2 Äqu/m²a	This product has a verified Environmental Product Declaration (EPD) according to ISO 14025 and EN 15804 + A2. The evaluation of the credit depends on the overall certification. For more information see chapter EcoFacts.
	ANF2: Nachhaltige Materialgewinnung ▪ Mindestens 50% der neu eingebauten Hölzer/Holzprodukte und/oder Holzwerkstoffe stammen nachweislich aus nachhaltiger Forstwirtschaft	The product is verified by the ISO 38200:2018 statements. Additionally, the product can be purchased in other 3rd party certified qualities **on request,** e.g. PEFC. Use delivery receipt as evidence. See chapter "Wood Origin" for further information.
Anhang 3.1.3: Schadstoffvermeidung in Bauprodukten	**1.1 Übergreifende Anforderung für die Güte des Gebäudes** ▪ Produktdokumentation und Deklaration enthaltener SVHC >0,10 %	The product complies with these criteria. See chapter "Constituent Materials" for further information Use Manufacturer Declaration REACH as evidence.
	8. Imprägnierungen zum Zweck des chemischen Holzschutzes ▪ In Innenräumen keine Biozide zugelassen	The product complies with these criteria. Use Manufacturer Declaration on Biocides as evidence.
	9.1 & 9.2 Holzwerkstoffe für den Holzbau und Innenausbau ▪ Einhaltung AgBB-Schema ▪ Formaldehyd ≤ 0,08 ppm (DIN EN 16516 2018) ▪ Reproduktionstoxische Borverbindungen ≤ 0,10%	The product complies with these criteria. See chapter "Constituent Materials" for further information. Use TÜV PROFiCERT-product Interior – certificate and Manufacturer Declaration REACH as evidence.

Compliance with CAM Italy – Minimal Environmental Criteria for Buildings and Interior Furnishing (Mindestumweltkriterien für Gebäude und Inneneinrichtungen)

The product fulfills the requirements placed on construction products according to the *Mindestumweltkriterien für Gebäude*. The *Mindestumweltkriterien für Gebäude* are currently only available in German and Italian.

The analysis is based on the *Ministerialdekret 25.11.2025.* For further information, please go to Autonome Provinz Bozen - Website und Hinweise - Rechtsvorschriften

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Number	Credit Name and Description	Product Contribution
2.4.1 & 3.2.6	**Emissionen in geschlossenen Räumen (Luftverschmutzung in Innenräumen)** Platten für die Innenausstattung Anforderung (Werte nach EN 16516): ▪ VOC gesamt (28d) <1000 µg/m³ ▪ Formaldehyd (28d) <60 µg/m³ Belohnende Punktezahl: ▪ VOC gesamt (28d) <500 µg/m³ ▪ Formaldehyd (28d) <10 µg/m³ Nachweis: AgBB (Deutschland)	Product meets the emissions criteria. Use TÜV PROFiCERT - product Interior certificate as evidence document.

Number	Credit Name and Description	Product Contribution
2.4.6	**Holzprodukte** ▪ Alle im Rahmen des Projekts verwendeten Holzprodukte müssen gemäß den Angaben unter Punkt „a“ des Nachweises aus nachhaltig bewirtschafteten Wäldern stammen.	The product is verified by the ISO 38200:2018 statements. Additionally, the product can be purchased in other 3rd party certified qualities **on request,** e.g. PEFC. Use delivery receipt as evidence. See chapter “Wood Origin“ for further information.
4.3.4	**Nachwachsende Rohstoffe**	The product can contribute to this criterion via this document.

Additionally, the product fulfils the requirements placed on interior furnishing according to the *Mindestumweltkriterien für die Lieferung neuer Inneneinrichtungen.*

The *Mindestumweltkriterien für Gebäude* are currently only available in German and Italian and the analysis is based on the *Ministerialdekret 23. Juni 2022*. For further information, please go to Autonome Provinz Bozen - Website und Hinweise - Rechtsvorschriften.

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Number	Credit Name and Description	Product Contribution
4.1.2	**Schadstoffe in Platten aus recyceltem Holz** ▪ Prüfberichte gemäß den Verfahren laut Anlage A zum „EPF Standard for Delivery Conditions of Recycled Wood“ (2002)	Data concerning these criteria is only available on request.
4.1.3	**Formaldehyd-Emissionen aus Platten** Die Formaldehyd-Emissionen fertiger Holzplatten < 50% des Werts der Klasse E1 gemäß Anhang B der Norm UNI EN 13986 ▪ ≤ 0,062 mg/m^3 / ≤ 0,05 ppm (nach EN 717-1)	Product meets the emissions criteria. Use TÜV PROFiCERT - product Interior certificate as evidence document.
4.1.4	**Emission flüchtiger organischer Verbindungen** Die Emission flüchtiger organischer Verbindungen (TVOC) aus fertigen Erzeugnissen bzw. einem jeden der Materialien, der Bestandteile oder der Halbfertigerzeugnisse ≤ 500 µg/m^3 (nach EN 16516)	
4.1.5	**Holzprodukte** ▪ Die fertigen Produkte sind aus Holz oder Holzfaser aus nachhaltig bewirtschafteten Wäldern gefertigt oder können auch recycelt sein, bzw. können beide Anteile – nachhaltiges Holz bzw. recyceltes Holz – in variablen Anteilen mit einer Summe von 100% im Produkt enthalten sein.	The product is verified by the ISO 38200:2018 statements. Additionally, the product can be purchased in other 3rd party certified qualities **on request,** e.g. PEFC. Use delivery receipt as evidence. See chapter “Wood Origin“ for further information.

Compliance with HQE Residential Certification Scheme

EGGER AquaDura+ is compliant with the preconditions placed on construction products according to Technical Requirements guide for built and renovated residential buildings performance by CERQUAL Qualitel Certification.
The analysis is based on the version from 1st February 2023.
For further information, please go to https://www.qualitel.org/

Please note that reworking or manipulating the product (e. g. milling, sanding, drilling, coating or lacquering) may invalidate the applicability of the following table.

Concept	Feature and Description	Product Contribution	LEVEL
QAI. 1.6	**Contribution of construction products to indoor air quality** Asbestos-containing materials are not permitted in Construction projects.	The product complies with this precondition. Use Manufacturer Declaration – Asbestos for evidence	Precondition
QAI. 1.8	**Contribution of construction products to indoor air quality** Building components and materials used in the construction that may come into contact with occupiers emit less than: ▪ 0.06 mg of formaldehyde per m^3 of material or component ▪ 0.001 of other categories 1A and 1B carcinogenic volatile organic compounds per m^3 of material component	The product complies with this requirement. Please use TÜV PROFiCERT-product interior certificate as evidence.	HQE 2 pts
REM.1	**Material Resource** The new construction products used incorporate a minimum of recycled material: At least 2 families of construction products containing at least 15 % recycled material are used.	See chapter "Wood Origin" for further information. Use Manufacturer Declaration on Timber Origin as source document.	HQE 3 pts
REM. 2	**Material Resource** Some of the construction products or equipment used come from re-use or recycling: At least 1 product family.		HQE 3 pts
DEC. 2.1.	**Disassembly** Provisions are made for construction techniques to limit the production of waste at source.	The application of these credits depend heavily on the product use. In case of doubt, please contact your sales person for additional documents.	HQE 3 pts
DEC. 2.2.	**Disassembly** Building designs and construction techniques support circularity with the possibility that components can be used for other purposes. The minimum provisions to be taken into account are those provided in the "Additional Information" section.		HQE 3 pts
CC. 1	**Environmental impact** Where Carbon regulations require a building life cycle analysis, it must be complied with.	This product has a verified Environmental Product Declaration (EPD) according to ISO 14025 and EN 15804 + A2 . The fulfilment of this requirements depends on the CO2 regulations and whether they require an LCA.	Precondition
CC. 2	**Environmental impact** In the absence of Carbon regulations, the environmental impact of the building is calculated according to European standard EN 15978 or international standard ISO		HQE 2 pts

Concept	Feature and Description	Product Contribution	LEVEL
	21931.		
CC. 3	**Environmental impact** The products have environmental declarations in accordance with ISO 21930 or EN 15804 where available.		HQE

Footnotes

Plant Addresses

Production Plant	Address
Wismar, DE	EGGER Holzwerkstoffe Wismar GmbH & Co. KG, Am Haffeld 1, 23970 Wismar (DE)

List of Abbreviations

Abbreviation	Meaning
EPD	Environmental Product Declaration
GWP	Global Warming Potential
GWP-Luluc	Global Warming Potential - Land Use and Land Use Change
HFR	Halogenated Flame Retardants
PFAS	Per- and Polyfluoroalkyl Substances
REACH	Regulation Concerning the Registration, Evaluation, Authorization and Restriction of Chemicals
SVHC	Substance of Very High Concern
TSCA	Toxic Substances Control Act
VOC	Volatile Organic Compounds